

D-Sub Miniature Modules

Available in male and female, 9, 15 or 25-pin versions, these connector modules provide a fast, convenient method of transitioning between D-Sub connectors and field wiring through the use of screw terminals.

Modules mount on 35 mm DIN rail part #DN-R35S1 (see Accessories below).



ZL-CMDB9



ZL-CMDB15



ZL-CMDB25


Specifications									
D-Sub Miniature	Part #	Pcs/Pkg	Price/Pkg	Part #	Pcs/Pkg	Price/Pkg	Part #	Pcs/Pkg	Price/Pkg
		ZL-CMDB9	1	<--->	ZL-CMDB15	1	<--->	ZL-CMDB25	1
Description	Connector module, 9-pin male and female Dsub to terminal blocks			Connector module, 15-pin male and female Dsub to terminal blocks			Connector module, 25-pin male and female Dsub to terminal blocks		
Approvals	UL/CUL/CE pending			UL/CUL/CE pending			UL/CUL/CE pending		
Voltage Ratings	50VAC/75VDC			50VAC/75VDC			50VAC/75VDC		
Maximum Current per Channel	1A			1A			1A		
Number of Channels	9			15			25		
Wire Range (Rated Cross Section)	14 - 22 AWG (0.2 - 2.5mm ²)			14 - 22 AWG (0.2 - 2.5mm ²)			14 - 22 AWG (0.2 - 2.5mm ²)		
Wire Strip Length	0.32"(8mm)			0.32"(8mm)			0.32"(8mm)		
Operating Temperature Range	-10°C to +50°C			-10°C to +50°C			-10°C to +50°C		
Dimensions (L x W x H)	1.53"(39mm)x2.48"(63mm)x2.58"(93mm)			1.93"(49mm)x2.48"(63mm)x2.58"(93mm)			2.87"(73mm)x2.48"(63mm)x2.58"(93mm)		
D-Sub Shielded Cable	ZL-DB9-CBL			ZL-DB15-CBL			ZL-DB25-CBL		

ZL-CMDB9

ZL-CMDB15

ZL-CMDB25

Dimensions

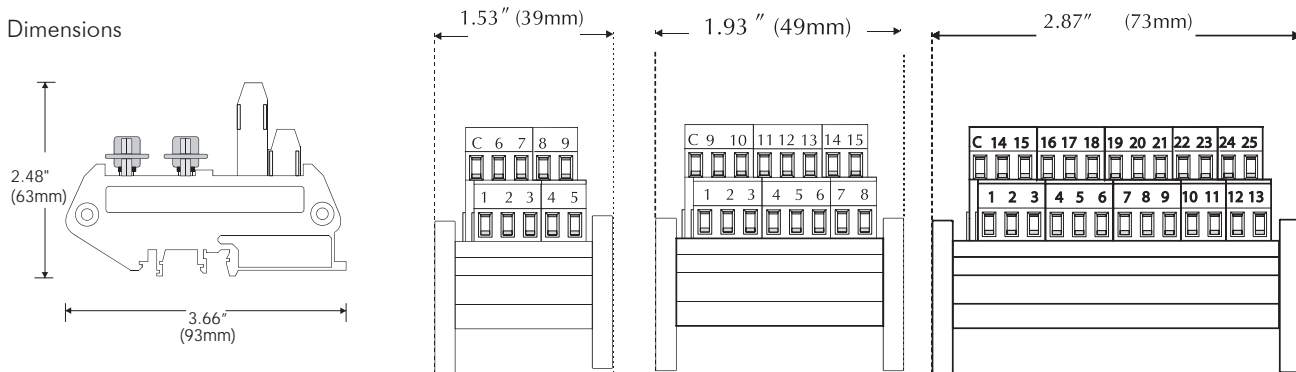

Note: See wiring details on our Web site at: <http://www.automationdirect.com/static/manuals/ziplinks/ziplinks.html>