


Advantech Configurable Panel PCs

Compatible with diverse mini-ITX motherboards for a wide range of industrial applications

- ／ Introduction
- ／ Benefits and Features
- ／ Selection Guide

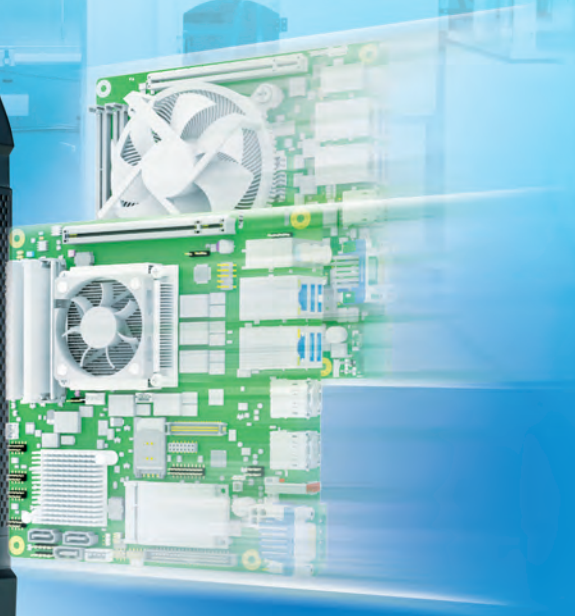

ADVANTECH


Enabling an Intelligent Planet

www.advantech.com

Configurable Panel PC Introduction

One major disadvantage of traditional panel PCs is the lack of flexible configuration, which limits customers to the system options chosen by the manufacturer. To address this problem, Advantech developed the industry's first configurable panel PC that allows system integrators to select any mini-ITX motherboard (MB) for installation by Advantech engineers.

For Certified Motherboards (Listed in the Selection Table)

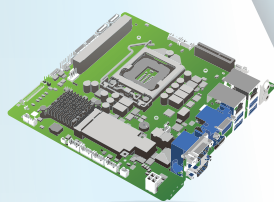


Choose a Certified MB

Choose a certified mini-ITX MB according to functionality, CPU, I/O, and price.




Select a Chassis

Find a corresponding chassis and CPU cooler according to the selected MB.



Configure the System

Configure the MB, chassis, CPU, and other components.



Assemble with CTOS

Assemble and test the configuration with Advantech's CTOS in just 7 days.

For Non-Certified Motherboards

In addition to providing a list of pre-certified motherboards that can be installed in just 7 days, Advantech can conduct essential validations of compatibility, reliability, and EMC to certify any off-the-shelf motherboard within 30 days.

Only 30 Days for Validation




Compatibility Testing

Advantech's Design Quality Assurance team conducts stress tests to verify functionalities, compatibility, and I/O.



Reliability Testing

Advantech verifies operational temperature and thermal profile, and conducts shock and vibration tests.

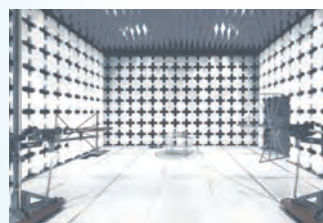


EMC Testing

Pre-scan tests for EMI and EMC are conducted in certified laboratories.



Certified MB


MB is certified and added to the Selection Table.

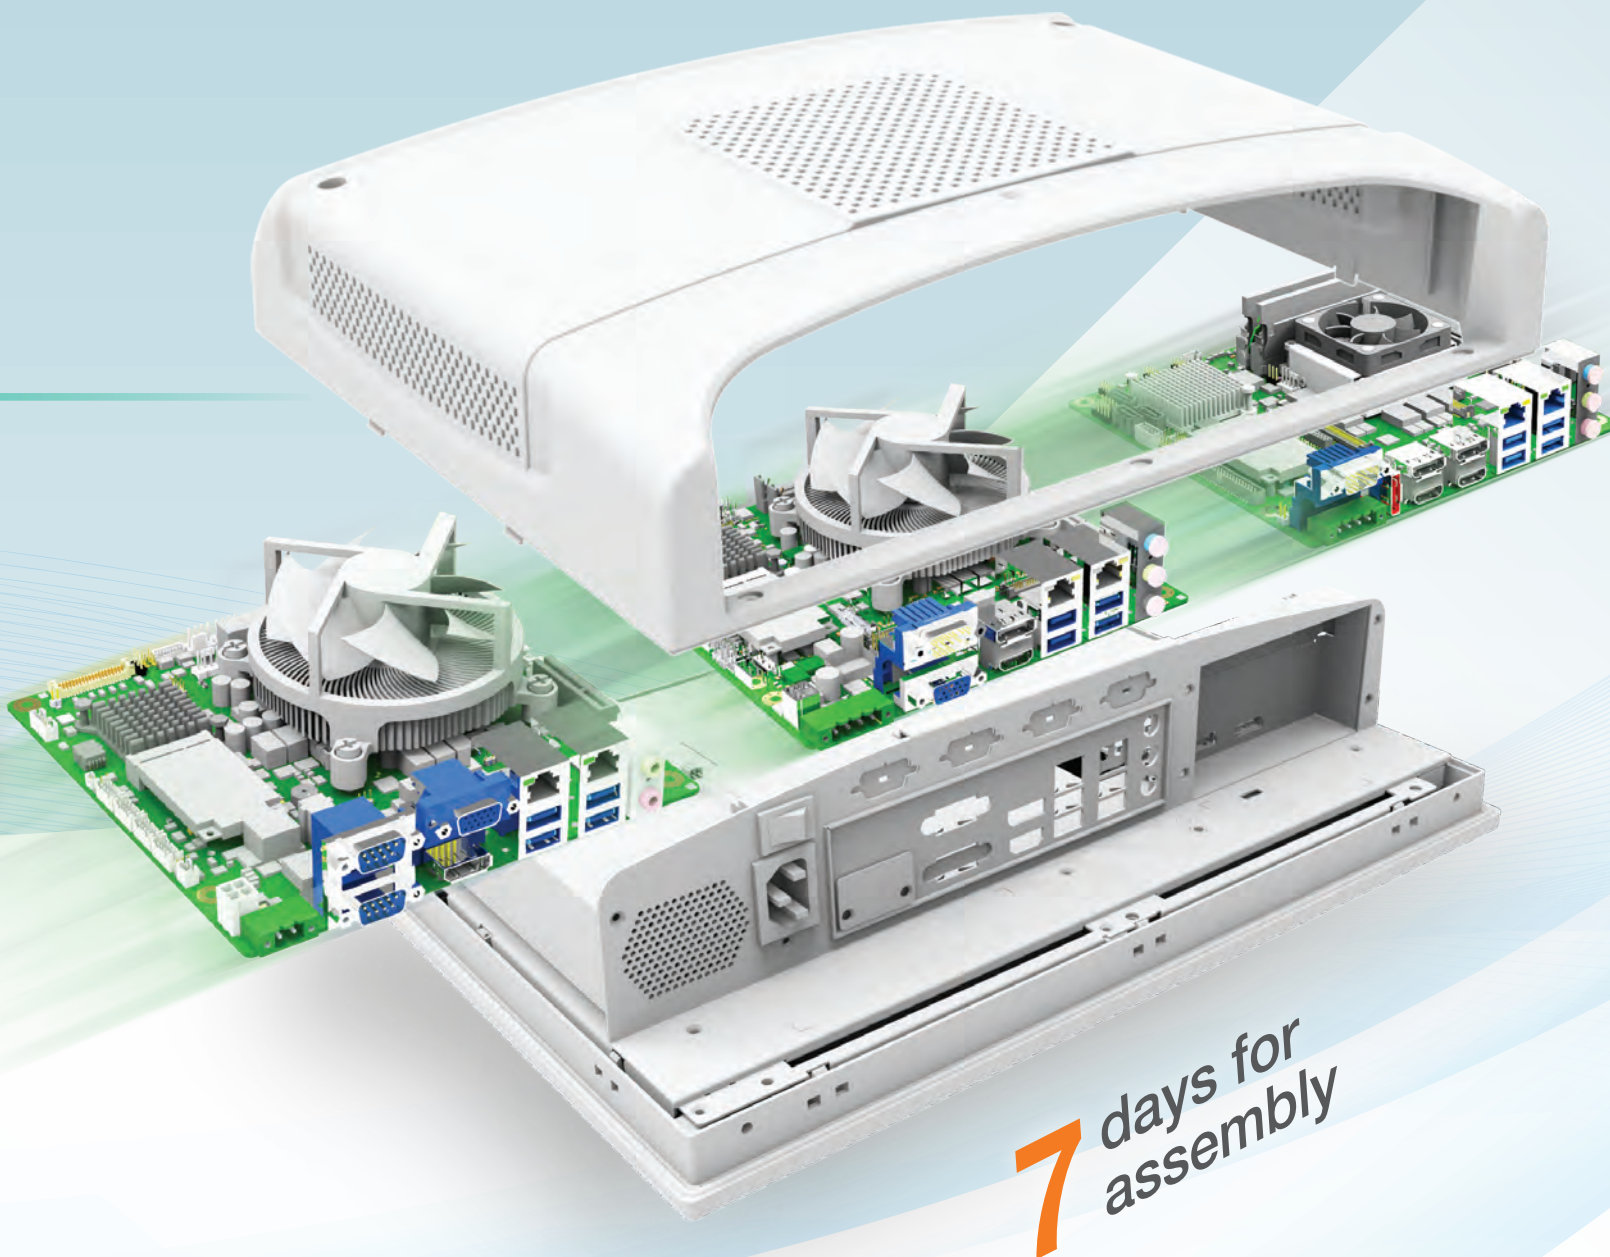

7 days for
assembly


Easy On-Site Maintenance

Because of the high cost of maintaining global after-sales services, system integrators require panel PCs that can be repaired and upgraded in the field directly. With its innovative modular design and fewer assembly screws, Advantech's PPC-6000C series allows technicians to conveniently conduct maintenance and servicing on-site.



Fewer Screws

The simple modular design and few screws required streamline system assembly.

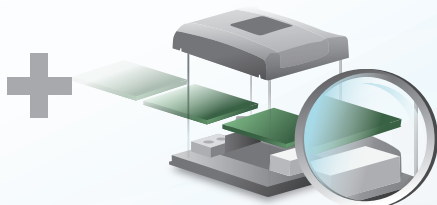

Modular Design

System components, such as the PSU, MB, fan, and riser card, can be installed and removed independently.



Easy In-Field Replacement

Defective parts can be easily replaced on-site in the field, eliminating the downtime and cost of sending the system to an RMA center.

Features

The PPC-6000C series of panel PCs not only allows customers to configure the system according to their needs, but also features various industrial functionalities to support a wide range of applications.



15" true-flat PPC with resistive touch control

The true-flat resistive touch display panel is elegant in appearance and easy to clean.



Daughter board interface for diverse MB

Proprietary daughter board ensures 100% compatibility between various mini-ITX MBs and panels.



PCI/PCIe x4 expansion slots

PCI/PCIe x4 slots support flexible expansion and increased functionality for diverse applications.



IP65-compliant

Innovative design features front panel with IP65 certification for dust and water protection.



Front LEDs indicate power status

Front-facing LED indicators allow users to easily check the system power status.






Supports certified mini-ITX motherboards

Compatible with various certified mini-ITX MB to support a wide range of application scenarios.

Selection Guide

Hot Selling



MB	PPC-MB-8260AE	AIMB-275	AIMB-226
			
Chassis	PPC-6151C-RTAE	PPC-6151C-RMAE	PPC-6151C-RMAE
MB Features	1. 6th Gen Intel® Core™ i LGA 1151 processor 2. Cost effective 3. Dual PCI expansion slots	1. 6th Gen Intel® Core™ i LGA 1151 processor 2. Supports dual HDDs with RAID	1. 2nd Gen AMD® R-Series quad/dual-core processor 2. Supports 4 independent displays
Cooler	1960053207N001	1960053207N001	1960061914N001 (M/B included)
CPU	6th Gen Intel® Core™ i LGA 1151 processor, up to 45W	6th Gen Intel® Core™ i LGA 1151 processor, up to 45W	2nd Gen AMD® R-Series™ quad/dual-core processor, up to 35W
Memory	1 x 260-pin SODIMM DDR4 2133MHz, up to 16 GB	2 x 260-pin SODIMM DDR4 2133MHz, up to 32 GB	2 x 204-pin SODIMM DDR3 2133MHz, up to 16 GB per SODIMM
Display Type	TFT LED LCD	TFT LED LCD	TFT LED LCD
Display Size	15"	15"	15"
Max. Resolution	1024 x 768	1024 x 768	1024 x 768
Max. Color	16.7M	16.7M	16.7M
Luminance (cd/m2)	400 nits	400 nits	400 nits
Viewing Angle (H/V)	80 (left), 80 (right) 70 (up), 70 (down)	80 (left), 80 (right) 70 (up), 70 (down)	80 (left), 80 (right) 70 (up), 70 (down)
Backlight MTBF	50,000 hrs	50,000 hrs	50,000 hrs
Touchscreen	Analog 5-wire resistive	Analog 5-wire resistive	Analog 5-wire resistive
Network (LAN)	2 x GbE (Intel® I211)	2 x GbE (LAN1 i219LM, LAN2 i211AT)	2 x GbE (Realtek 8111G)
I/O Ports	1 x RS232/422/485, 1 x RS232, 1 x DP 1.3, 1 x VGA, 4 x USB 3.0, 1 x Line Out, 1 x Mic In, 3 x RS232 (via cable), 1 x GPIO (8 channels, via cable)	1 x RS-232, 1 x DP 1.2 (1 reserved for LCD panel) 1 x HDMI 2.0/1.2, 1 x VGA, 4 x USB 3.0 (1 reserved for touchscreen) 1 x Line Out, 1 x Mic In, 1 x Line In	1 x RS-232, 2 x DP 1.2 (1 reserved for LCD panel), 2 x HDMI (4 independent displays), 1 x eSATA, 2x USB 3.0, 2 x USB 2.0 (1 reserved for touchscreen), 1 x Line Out, 1 x Mic In, 1 x Line In, 1 x RS-232/422/485 (via cable), 3 x RS-232 (via cable)
HDD (optional)	1 x 2.5" SATA HDD	2 x 2.5" SATA HDD with RAID support	2 x 2.5" SATA HDD
Expansion Slots	1 x PCIe x4 or 2 x PCI	1 x PCIe x4 or PCI	1 x PCIe x4 or PCI
Additional Expansion	1 x full-size mSATA or mini PCIe	1 x M.2, 1 x full-size mSATA or mini PCIe	1 x full-size mini PCIe or mSATA, 1 x full-size mini PCIe or SIM holder
Power Input (Voltage)	100 ~ 240 V _{AC}	100 ~ 240 V _{AC}	100 ~ 240 V _{AC}
Ingress Protection	IP65-rated front panel	IP65-rated front panel	IP65-rated front panel
Mount Options	Panel Mount	Panel Mount	Panel Mount
Operating Temperature	0 ~ 50 °C (32 ~ 122 °F)	0 ~ 50 °C (32 ~ 122 °F)	0 ~ 50 °C (32 ~ 122 °F)
Storage Temperature	-20 ~ 60 °C (-4 ~ 140 °F)	-20 ~ 60 °C (-4 ~ 140 °F)	-20 ~ 60 °C (-4 ~ 140 °F)
Dimensions	391.4 x 312.5 x 103.6 mm (15.4 x 12.3 x 4.08")	391.4 x 312.5 x 103.6 mm (15.4 x 12.3 x 4.08")	391.4 x 312.5 x 103.6 mm (15.4 x 12.3 x 4.08")
Weight	5.4 kg (11.9 lb)	5.4 kg (11.9 lb)	5.4 kg (11.9 lb)
Certification	CE, FCC Class A, UL, CB, CCC, BSMI	CE, FCC Class A, UL, CB, CCC, BSMI	CE, FCC Class A, UL, CB, CCC, BSMI
Operating System	WES7/Win 7 Pro/Win 8.1 (64 bit)/Win 10 IOT LTSC	WES7/Win 7 Pro/Win 8.1 (64 bit)/Win 10 IOT LTSC	WES7/Win 8

Note : Please refer to the selection guide provided on Advantech's website for the latest product selectoin.

Regional Service & Customization Centers

China | Kunshan
86-512-5777-5666

Taiwan | Taipei
886-2-2792-7818

Netherlands | Eindhoven
31-40-267-7000

Poland | Warsaw
00800-2426-8080

USA | Milpitas, CA
1-408-519-3898

Worldwide Offices

Greater China

China
Toll Free 800-810-0345
Beijing 86-10-6298-4346
Shanghai 86-21-3632-1616
Shenzhen 86-755-8212-4222
Chengdu 86-28-8545-0198
Hong Kong 852-2720-5118

Taiwan
Toll Free 0800-777-111
Neihu 886-2-2792-7818
Xindian 886-2-2218-4567
Taichung 886-4-2329-0371
Kaohsiung 886-7-229-3600

Asia Pacific

Japan
Toll Free 0800-500-1055
Tokyo 81-3-6802-1021
Osaka 81-6-6267-1887
Nagoya 81-52-856-9657

Korea
Toll Free 080-363-9494
Seoul 82-2-3663-9494

Singapore
Singapore 65-6442-1000

Malaysia
Kuala Lumpur 60-3-7725-4188
Penang 60-4-537-9188

Thailand
Bangkok 66-2-248-3140

India
Bangalore 91-80-2545-0206
Pune 91-20-3948-2075

Indonesia
Jakarta 62-21-751-1939

Australia
Toll Free 1300-308-531
Melbourne 61-3-9797-0100
Sydney 61-2-9476-9300

Europe

Germany
Toll Free 00800-2426-8080/81
Munich 49-89-12599-0
Düsseldorf 49-2103-97-855-0

France
Paris 33-1-4119-4666

Italy
Milano 39-02-9544-961

Benelux & Nordics
Breda 31-76-523-3100

UK
Newcastle 44-0-191-262-4844
London 44-0-870-493-1433

Poland
Warsaw 48-22-31-51-100

Russia
Moscow 8-800-555-01-50
St. Petersburg 8-800-555-81-20

Czech Republi
Ústí nad Orlicí 420-465-521-020

Ireland
Oranmore 353-91-792444

Americas

North America
Toll Free 1-888-576-9668
Cincinnati 1-513-742-8895
Milpitas 1-408-519-3898
Irvine 1-949-420-2500
Ottawa 1-815-434-8731

Brazil
Toll Free 0800-770-5355
São Paulo 55-11-5592-5355

Mexico
Toll Free 1-800-467-2415
Mexico City 52-55-6275-2727

Buy Now



8600000304

ADVANTECH

Enabling an Intelligent Planet

<http://www.advantech.com>

Please verify specifications before quoting. This guide is intended for reference purposes only. All product specifications are subject to change without notice.

No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of the publisher.

All brand and product names are trademarks or registered trademarks of their respective companies.

© Advantech Co., Ltd. 2016