



AutomationDirect » Socomec Fusible Disconnects

Direct Operation

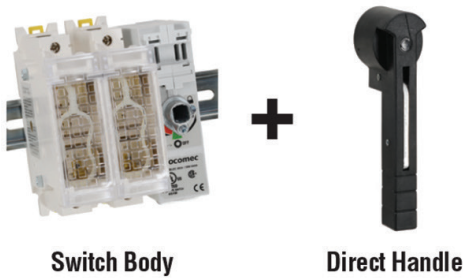

OR

External Operation

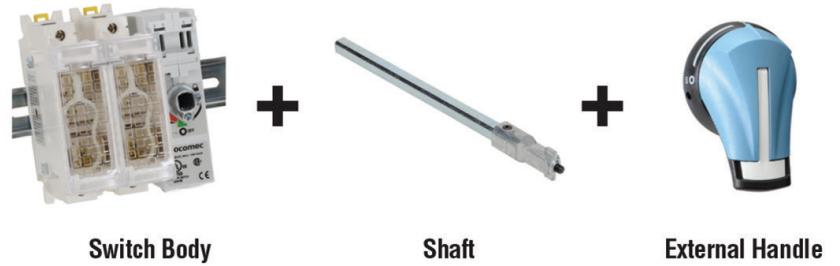

Part Number	UL98 - Compact Fusible Disconnect Switches - 600VAC
38613004	30A 3-pole Class J Fusible disconnect switch - Front or Side operated - Frame Size 4
38616004	30A 4-pole Class J Fusible disconnect switch - Front or Side operated - Frame Size 4
38613005	60A 3-pole Class J Fusible disconnect switch - Front or Side operated - Frame Size 4
38616005	60A 4-pole Class J Fusible disconnect switch - Front or Side operated - Frame Size 4
38613010	100A 3-pole Class J Fusible disconnect switch - Front or Side operated - Frame Size 5
38616010	100A 4-pole Class J Fusible disconnect switch - Front or Side operated - Frame Size 5
38613020	200A 3-pole Class J Fusible disconnect switch - Front or Side operated - Frame Size 6
38616020	200A 4-pole Class J Fusible disconnect switch - Front or Side operated - Frame Size 6
Options	
39543020	Terminal Lugs - 3-pole - 200A - #6-300MCM AWG
39544020	Terminal Lugs - 4-pole - 200A - #6-300MCM AWG
38983020	Terminal Shrouds - 3-pole - 200A for line or load protection
38984020	Terminal Shrouds - 4-pole - 200A for line or load protection
39990701	1 NO Aux Contacts for 30-200A Disconnects - Front Mount - 3A@24VAC - 4 Aux Cont Max
39990702	1 NC Aux Contacts for 30-200A Disconnects - Front Mount - 3A@24VAC - 4 Aux Cont Max
3999U041	1 NO Aux Contacts for 30-200A Disconnects - Side Mount - 10A@600VAC - 2/Pk
3999U042	1 NO / 1 NC Aux Contacts for 30-200A Disconnects - Side Mount - 10A@600VAC - 2/Pk
UL98 - Front Operation Handles - 30-200A	
36297910	Black Direct Mount Handle - no shaft required
141F2111	Black/Blue, 30-60A, Type S1, Frame 4, NEMA 1,3R,12, Test I-0, shaft required
141G2111	Red/Yellow, 30-60A, Type S1, Frame 4, NEMA 1,3R,12, Test I-O, shaft required
141D2111	Black/Blue, 30-60A, Type S1, Frame 4, NEMA 4/4X, Test I-0, shaft required
141E2111	Red/Yellow, 30-60A, Type S1, Frame 4, NEMA 4/4X, Test I-0, shaft required
141D2115	Black/Blue, 30-60A, Type S1, Frame 4, NEMA 4/4X, Test I-0-Test, shaft required
141E2115	Red/Yellow, 30-60A, Type S1, Frame 4, NEMA 4/4X, Test I-0-Test, shaft required
142F2111	Black/Blue, 100-200A, Type S2, Frame 5/6, NEMA 1,3R,12, Test I-0, shaft required
142G2111	Red/Yellow, 100-200A, Type S2, Frame 5/6, NEMA 1,3R,12, Test I-0, shaft required
142D2111	Black/Blue, 100-200A, Type S2, Frame 5/6, NEMA 4/4X, Test I-0, shaft required
142E2111	Red/Yellow, 100-200A, Type S2, Frame 5/6, NEMA 4/4X, Test I-0, shaft required
142D2115	Black/Blue, 100-200A, Type S2, Frame 5/6, NEMA 4/4X, Test I-0-Test, shaft required
142E2115	Red/Yellow, 100-200A, Type S2, Frame 5/6, NEMA 4/4X, Test I-0-Test, shaft required
UL98 - Right Side Operation Handles - 30-200A - All NEMA 4/4X - All Test I-0	
141H6111	Black/Blue, 30-60A, Type S1, Frame 4
141I6111	Red/Yellow, 30-60A, Type S1, Frame 4
142H6111	Black/Blue, 100-200A, Type S2, Frame 5/6
142I6111	Red/Yellow, 100-200A, Type S2, Frame 5/6
Shafts and Shaft Guide for External Handle Types S1 & S2	
14001020	7.9" or 200mm shaft
14001032	12.6" or 320mm shaft - shaft guide included
14001040	15.7" or 400mm shaft - shaft guide included

